# Reed Auto Switch Direct Mounting Style D-Z73/D-Z76/D-Z80

( (

# **Auto Switch Specifications**



Refer to SMC website for the details of the products conforming to the international standards.

### PLC: Programmable Logic Controller

| D-Z7 (With indicator light)                             |                                                 |                    |                     |  |  |  |
|---------------------------------------------------------|-------------------------------------------------|--------------------|---------------------|--|--|--|
| Auto switch model                                       | D-Z73                                           |                    | D-Z76               |  |  |  |
| Applicable load                                         | Relay, PLC                                      |                    | IC circuit          |  |  |  |
| Load voltage                                            | 24 VDC                                          | 100 VAC            | 4 to 8 VDC          |  |  |  |
| Max. load current and load current range <sup>(3)</sup> | 5 to 40 mA                                      | 5 to 20 mA         | 20 mA               |  |  |  |
| Contact protection circuit                              | None                                            |                    |                     |  |  |  |
| Internal voltage drop                                   | 2.4 V or less (to 20 mA)/3 V or less (to 40 mA) |                    | 0.8 V or less       |  |  |  |
| Indicator light                                         | Red LED illuminates when turned ON.             |                    |                     |  |  |  |
| Standard                                                | CE marking                                      |                    |                     |  |  |  |
| D-Z8 (Without indicator light)                          |                                                 |                    |                     |  |  |  |
| Auto switch model                                       | D-Z80                                           |                    |                     |  |  |  |
| Applicable load                                         | Relay, PLC, IC circuit                          |                    |                     |  |  |  |
| Load voltage                                            | 24 V AC or less                                 | 48 V <sub>DC</sub> | 100 V <sub>DC</sub> |  |  |  |
| Maximum load current                                    | 50 mA                                           | 40 mA              | 20 mA               |  |  |  |
| Contact protection circuit                              | None                                            |                    |                     |  |  |  |
| Internal resistance                                     | 1 $\Omega$ or less (Including 3 m lead wire)    |                    |                     |  |  |  |

# • Lead wires

D-Z73/D-Z80—Oilproof heavy-duty vinyl cord, ø2.7, 0.18 mm², 2 cores (Brown, Blue), 0.5 m D-Z76—Oilproof heavy-duty vinyl cord, ø3.4, 0.2 mm², 3 cores (Brown, Black, Blue), 0.5 m

Note 1) Refer to page 1272 for reed auto switch common specifications.

Note 2) Refer to page 1272 for lead wire lengths.

Note 3) Under 5 mA, the strength of the indicator light is poor. In some cases, visibility of the indicator light will not be possible where the output signal is less than 2.5 mA. However, there is no problem in terms of contact output, when an output signal exceeds 1 mA or

CE marking

## Mass


| Auto switch model       |     | D-Z73 | D-Z76 | D-Z80 |
|-------------------------|-----|-------|-------|-------|
| Lead wire length<br>(m) | 0.5 | 7     | 10    | 7     |
|                         | 3   | 31    | 55    | 31    |
|                         | 5   | 50    | _     | _     |

# Dimensions D-Z73, Z80 D-Z76 M2.5 x 4L Slotted set screw 27.6 Indicator light D-Z80 without indicator light D-Z80 without indicator light 12.5 Most sensitive position 8 12.5 Most sensitive position 8



### A 1 - 0 - 11 - 1 - 1 - 1 - 1 - 1 - 1 - 1

Grommet

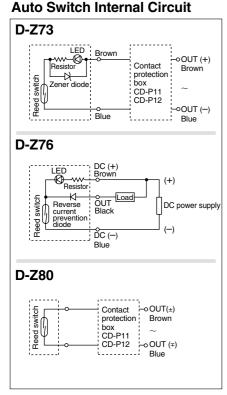

Note 1) Operating load is an induction load. Note 2) Wiring to the load is 5 m or longer. Note 3) Load voltage is 100 VAC.

Use the contact protection box in any of the above listed situations. The contact point life may decrease. (Refer to page 1273 for contact protection box.)

(g)